

## KEY FEATURES

Fast-charge bays

More connections, greater connectivity

Connect to an external monitor

Ethernet

Charges while you work

## THE TRIMBLE YUMA OFFICE DOCKING STATION ENABLES CONVENIENT AND EFFICIENT TRANSITION BETWEEN FIELD AND OFFICE

### SEAMLESSLY MOVE FROM FIELD TO OFFICE AND BACK AGAIN

The Trimble® Yuma™ Rugged Tablet office docking station works just like that of a regular laptop. Simply slide the Yuma rugged tablet into the docking station and immediately experience all-in-one connectivity to your monitor, mouse, keyboard, printer, and network. No hassles.

### FASTER, MORE CONVENIENT BATTERY CHARGING

The Trimble Yuma docking station features an external two-bay battery charger. This enhancement lets you charge four batteries at one time. Note: a set of batteries charged in the external bay charge twice as fast as those charged on the Trimble Yuma tablet itself.

### MORE CONNECTIONS, GREATER CONNECTIVITY

Placing the Trimble Yuma rugged tablet in the docking station puts even more external connections at your disposal for greater, more flexible connectivity. It offers four USB connectors, a serial port, an Ethernet port, and a VGA pass-through port.

Use the VGA port for connecting to an external monitor or projector for presentations. Connect to a secure network and multiple accessories such as DVD drives and external hard drives via USB. With the Trimble Yuma docking station you're unlikely to run out of connection options, whatever your office demands.



*The Trimble Yuma rugged tablet and docking station provide everything you need to get the job done right.*

# TRIMBLE YUMA DOCKING STATION



## TECHNICAL SPECIFICATIONS

### HARDWARE

#### Approximate Charge Times

- Two extended batteries in Dual Battery Charging Bay – 3.5hr
- Two standard batteries on Yuma (powered off) in dock – 5.5hr

### ENVIRONMENTAL

#### Temperature

Operating temperature.....-30 °C to +60 °C (-22 °F to +140 °F)  
 Charging temperature.....0 °C to 40 °C

Humidity ..... 95% RH, non-condensing  
 Water ..... Safe to dock wet Yuma rugged tablet

### LED INDICATORS

Dock Power LED (Trimble)	
with power .....	Blue
without power .....	off
Connection LED (I/O)	
with power and System on and connected .....	Green
all other conditions .....	off
2 x Battery Charging LED	
with power, charging .....	Amber
with power, Battery Full .....	Green
with power, Battery Error .....	Flash Amber
with power, no battery pack connected .....	off
without power .....	off

### PIN-CONNECTOR TO YUMA

I/O Port	Qty
USB 2.0 .....	4
RJ45 / Ethernet .....	1
headphone out .....	1
DC Input .....	1
Analog VGA Port .....	1
RS-232 / Serial .....	1
Battery Charger .....	2 bays
Stylus Holder .....	1
<b>Power</b>	
Wattage .....	90 W
Output Voltage .....	19 V

### CERTIFICATIONS


CE, FCC, C-TICK, RoHS Compliant



- |                             |                      |
|-----------------------------|----------------------|
| 1 Dual Battery charging bay | 7 DC Input           |
| 2 RJ45/Ethernet             | 8 LED-Dock Status    |
| 3 Headphone Out             | 9 LED-Dock Power     |
| 4 VGA Monitor               | 10 LED-Battery Right |
| 5 RS-232/Serial             | 11 LED-Battery Left  |
| 6 USB 2.0                   | 12 USB 2.0           |

© 2009, Trimble Navigation Limited. Trimble Navigation Limited. All rights reserved. Trimble and the Globe & Triangle logo are trademarks of Trimble Navigation Limited registered in the United States and in other countries. Yuma is a trademark of Trimble Navigation Limited. All other brand names and trademarks are property of their owners. Color display images shown may vary slightly from actual display. PN 022490-070 (08/09)

\* Image shows batteries seated in charging bays.

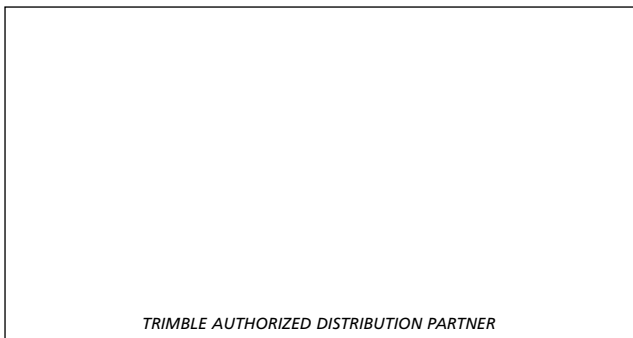

TRIMBLE AUTHORIZED DISTRIBUTION PARTNER

## TRIMBLE NAVIGATION LIMITED

P.O. Box 947  
 Corvallis, OR 97339  
 USA  
 541-750-9200 Phone  
[www.trimble.com/rugged](http://www.trimble.com/rugged)  
[www.outdoorugged.com](http://www.outdoorugged.com)



[www.trimble.com](http://www.trimble.com)